

Technical Data

SPS8000

Serial number:

DB-030

Version:07/2016

SANY PALFINGER SPV EQUIPMENT CO.,LTD
Rudong Development Zone, Nantong, Jiangsu, China
Service Hotline: +86 4008 878318
www.sanypalfinger.com



SPS12500

Basic data	SPS8000A		SPS8000B	
Rated lifting moment	8 mt		8 mt	
Rated lifting capacity	3200 kg	2.5 m	3200 kg	2.3 m
Max. outreach	7.8 m		10.2 m	
Max. lines of the hook	4		4	
Slewing angle (continuous)				
Boom raising angle	0~75°		0~75°	
	9.8 m		12.5 m	
	3.4 m		3.5 m	
	8.0 m		10.4 m	
	3		4	
	4.4 (m)		4.4 (m)	

45 55

NOTE

The mentioned speed is the maximum value when the crane is operated without load and under the recommended volumn which with oil temperature 45 ~ 55 .

Subject to change, production tolerances have to be taken into account.

Crane weight		
SPS8000A	Floor Control SPS8000A	1200 kg
SPS8000B	Floor Control SPS8000B	1300 kg

NOTE

The weight of the mounting kit was not included in the mentioned crane weight.

Subject to change, production tolerances have to be taken into account.

Dimensions

SPS8000B

Crane




Subject to change, production tolerances have to be taken into account.

Dimensions

SPS8000A


Crane

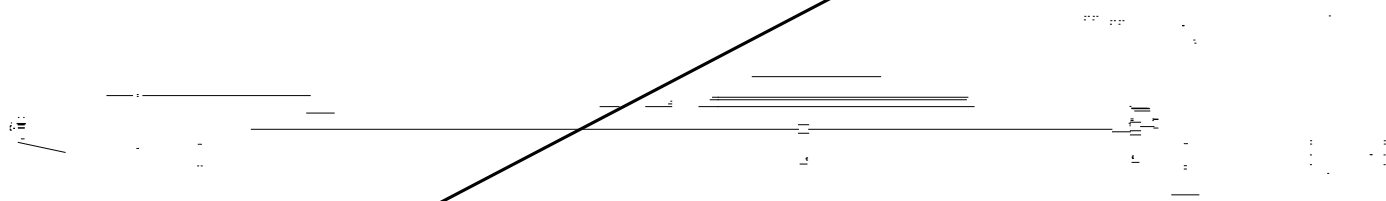

SPS8000

V02/2016-07

SPS8000A

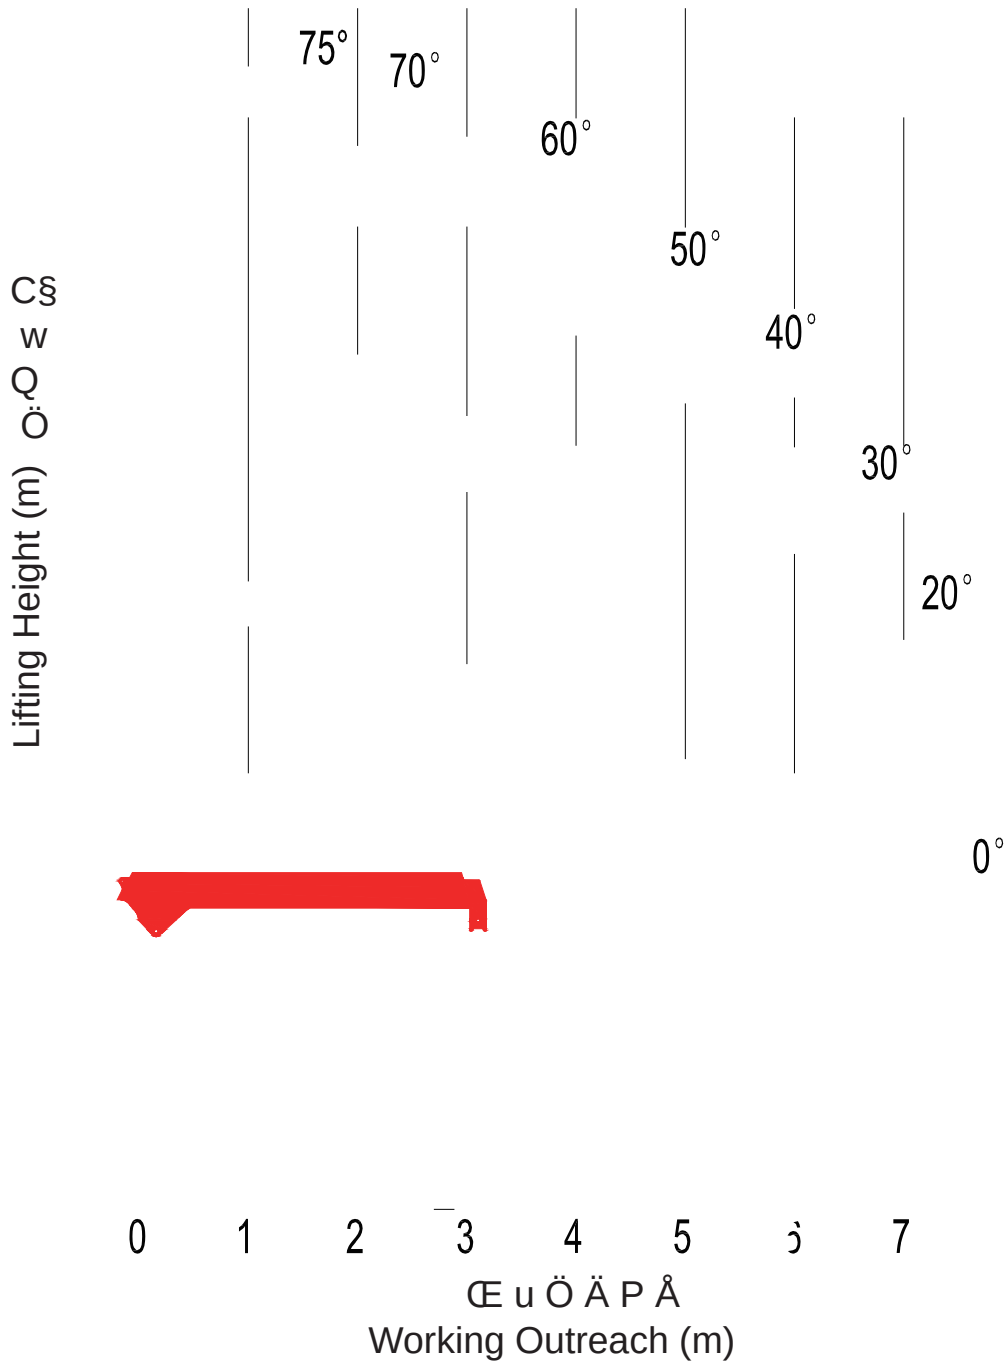

Öh
Y • ä† ëq† b Ô9 ú>ÙÁk Žb úe• ä† q†1GÿJ kÌ ú>1 Ý bÑ
... ñæìú> ož

NOTE

The above lifting heights and boom angles are based on a straight (unladen) boom.
Allowance should be made for boom deflection under laden conditions.
Lifting capacities must not exceed 85% of tipping load.

Subject to change

50°

°

3

6

() by

e

Subject to change, production tolerances have to be taken into account.

SPS8000A/SPS8000B

Intallation dimension

