SANY PALFINGER 三一帕尔菲格

Subject to change,production tolerances have to be taken into account.

Rated lifting m ment	12.5 mt	12.5 mt
	5000 kg 2.5 m	5000 kg 2.5 m
	9.0 m	11.6 m
Slewing angle (continuous)		
Boom raising angle		
(t(the measurement from outriggers fully extended))	11.1 m	13.6 m
sic boom	4.2 m	4.2 m
om	9.3 m	11.9 m
Boom sections		
ed)	5.1 (m)	5.1 (m)
Recommended volume for the system	55 L/min	55 L/min
Crane moment (dynamic)	176.4 kNm 18.0 mt	168.6 kNm 17.2 mt
Torsional moment (dynamic)	13.1 kNm 1.3 mt	13.1 kNm 1.3 mt

Subject to change,production tolerances have to be taken into account.

SPS12500A	
SPS12500B	

Subject to change, production tolerances have to be taken into account.□

□□□

□□



Subject to change,production tolerances have to be taken into account.

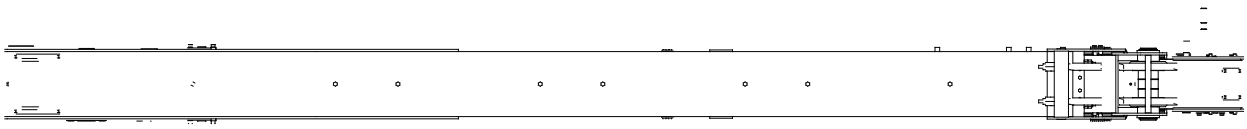

Subject to change,production tolerances have to be taken into account.

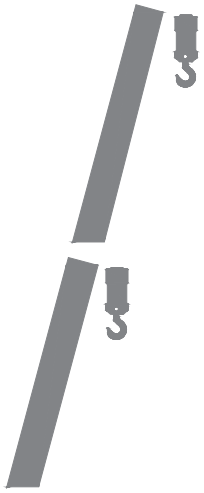



2 3 4 5 6 7 8 9 10

85%

Subject to change,production tolerances have to be taken into account.

85%

Subject to change,production tolerances have to be taken into account.

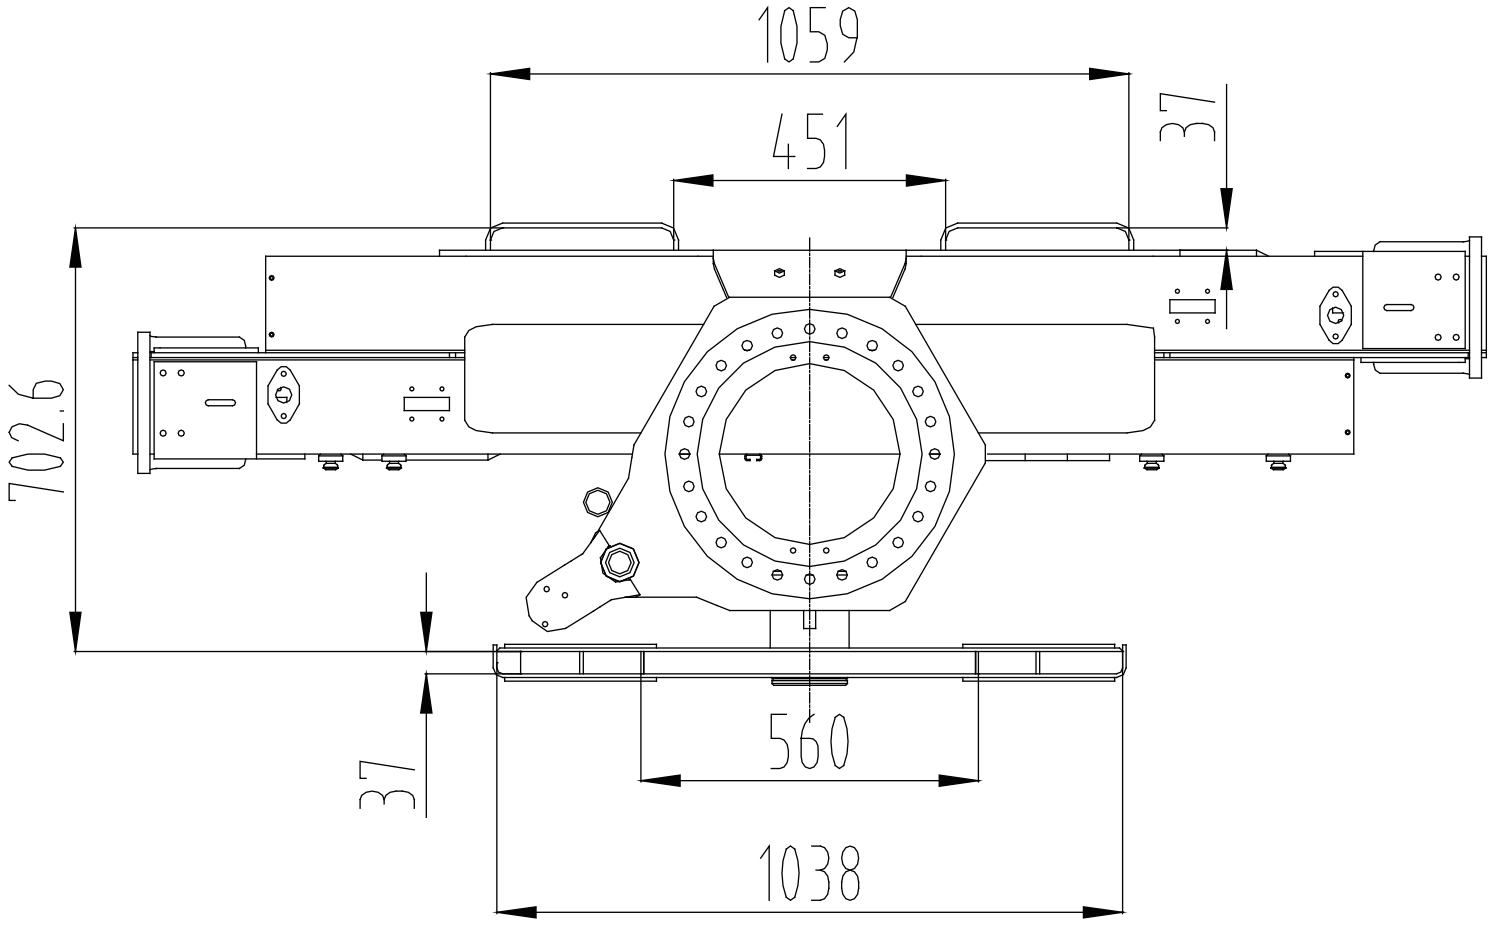

SANY PALFINGER

WWW.SANYPALFINGER.COM