

Technical Data

SPS17500

Serial number:

DB-044

Version:09/2016

SANY PALFINGER SPV EQUIPMENT CO.,LTD
Rudong Development Zone, Nantong, Jiangsu, China
Service Hotline: +86 4008 878318
www.sanypalfinger.com

SPS17500

V01/2016-09

Subject to change,production tolerances have to be taken into account.

		SPS17500B
	Rated lifting capacity	
	Max. outreach	
	Max. lines of the hook	4
		0~75°
	Max. lifting height(the ground after the	the
	Length of the ba	
		4
	Outrigger span(fully ex	
	t	
	Operating pressure	25/28 Mpa
	city	100 L

NOTE
The mentioned speed is the maximum value when the crane is operated without load and under the recommended volumn which with oil temperature 45 ~ 55 .

Subject to change, production tolerances have to be taken into account.



Floor Control SPS17500B-F	2730 kg
Floor Control SPS17500Bs-F	2720 kg

NOTE

The weight of the mounting kit was not included in the mentioned crane weight.

Subject to change, production tolerances have to be taken into account.


SPS17500B-F



NOTE
The low-seat is optional equipment.

Subject to change, production tolerances have to be taken into account.

SPS17500B

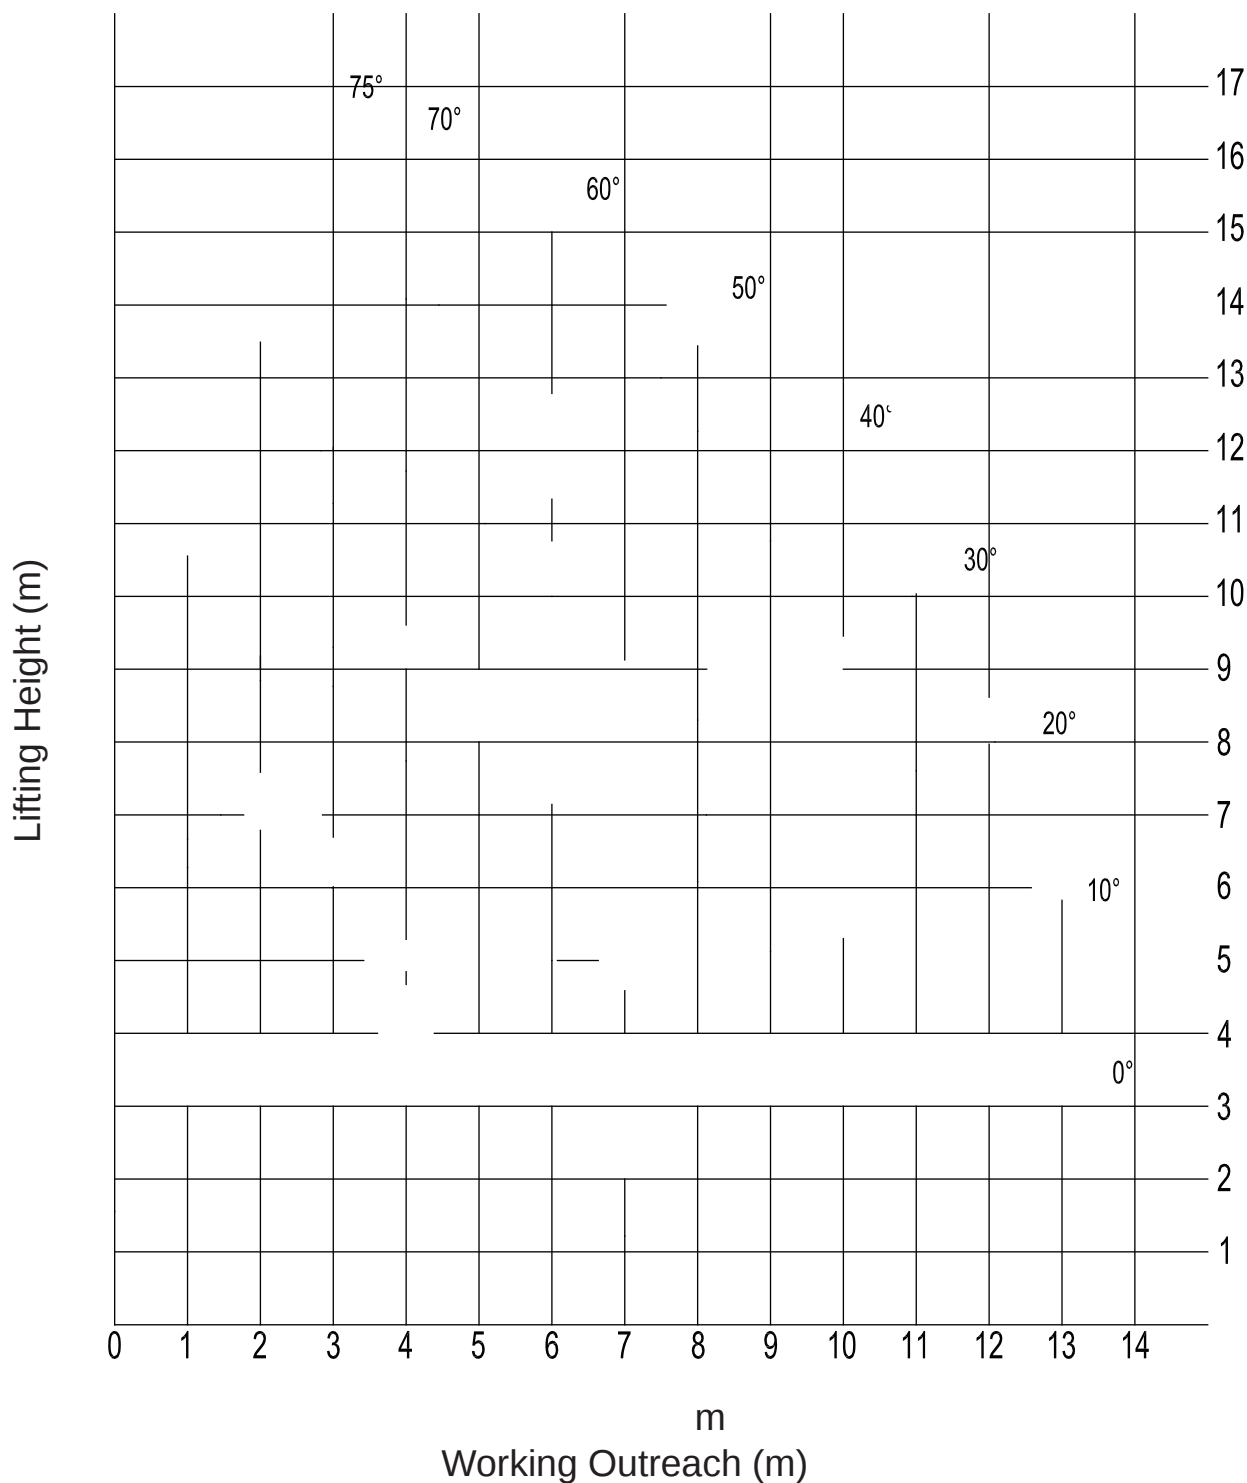

NOTE

The above lifting heights and boom angles are based on a straight (unladen) boom.
 Allowance should be made for boom deflection under laden conditions.
 Lifting capacities must not exceed 85% of tipping load.

