DB-013

Version:07/2016

SANY PALFINGER SPV EQUIPMENT CO.,LTD
Rudong Development Zone, Nantong, Jiangsu, China
Service Hotline: +86 4008 878318
www.sanypalfinger.com

	SPS20000B	SPS20000C
Rated lifting moment	20 mt	20 mt
Rated lifting capacity	8000 kg (2.5 m)	8000 kg (2.5 m)
Max. outreach	14.0 m	17.7 m
Max. lines of the hook	4	4
Slewing angle (continuous)		
Boom raising angle	0~75°	0~75°
( ) Max. lifting height(the measurement from the ground after the outriggers fully extended)	16.1 m	20.1 m
Length of the basic boom	5.3 m	5.3 m
Length of fully extended boom	14.3 m	18.1m
Boom sections	4	5
Outrigger span(fully extended)	5.6 (m)	5.6 (m)
Recommended volume for the system	70 L/min	70 L/min
Operating pressure	25/28 Mpa	25/28 Mpa
Oil tank capacity	200 L	200 L

45 55

NOTE

The mentioned speed is the maximum value when the crane is operated without load and under the recommended volumn which with oil temperature 45 ~ 55 .

Subject to change,production tolerances have to be taken into account.

SPS20000B	Floor Control SPS20000B	3820 kg
SPS20000C	Floor Control SPS20000C	4110 kg

NOTE
The weight of the mounting kit was not included in the mentioned crane weight.

Subject to change,production tolerances have to be taken into account.

SPS20000C-F

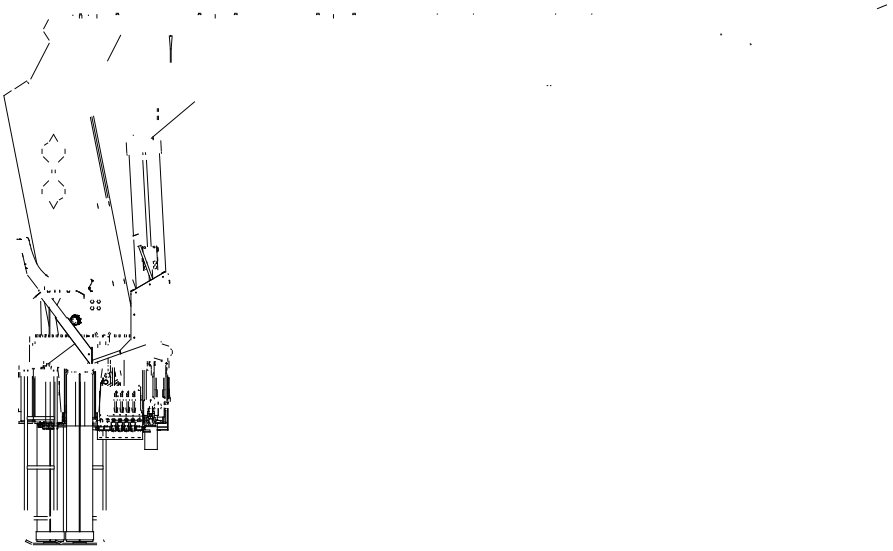

NOTE
The low-seat is optional equipment.

Subject to change,production tolerances have to be taken into account.

SPS20000B

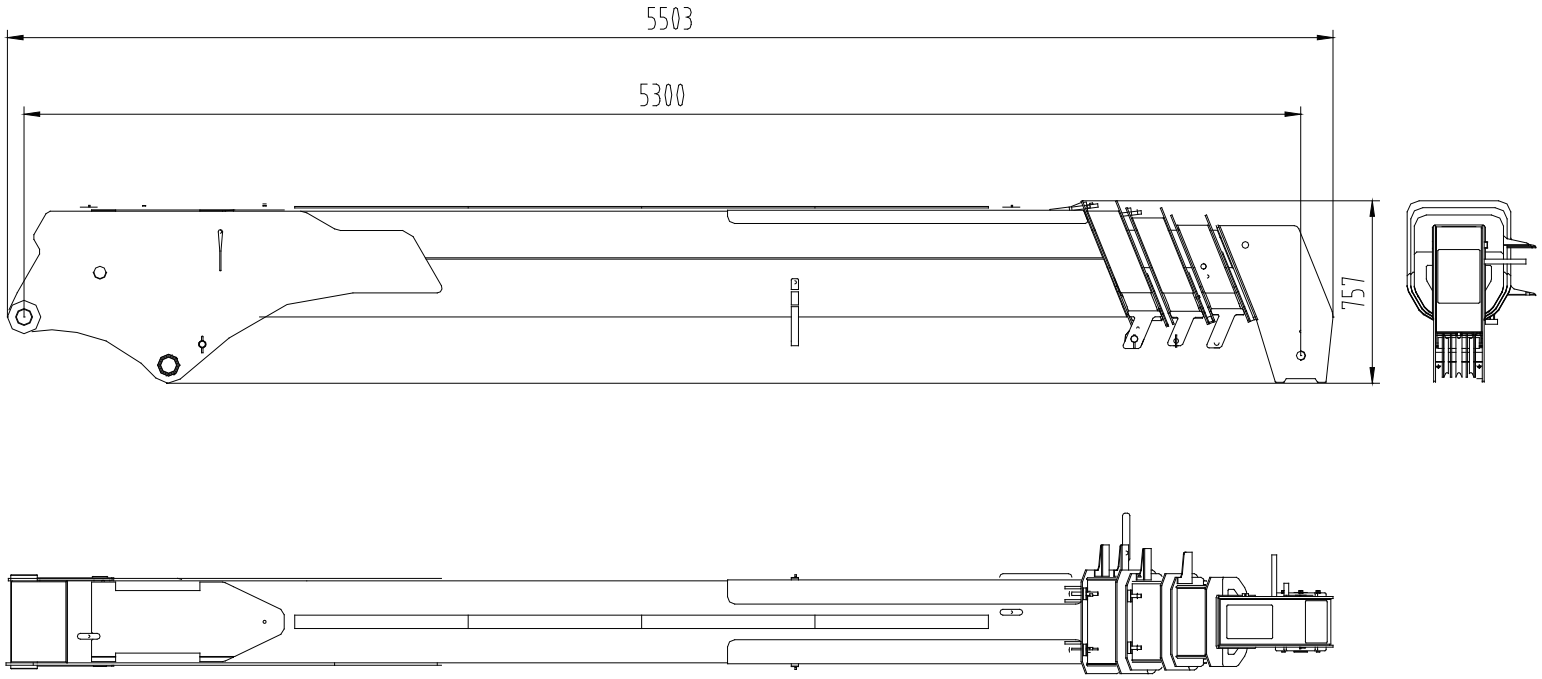

NOTE
The low-seat is optional equipment.

Subject to change,production tolerances have to be taken in account.

SPS20000B

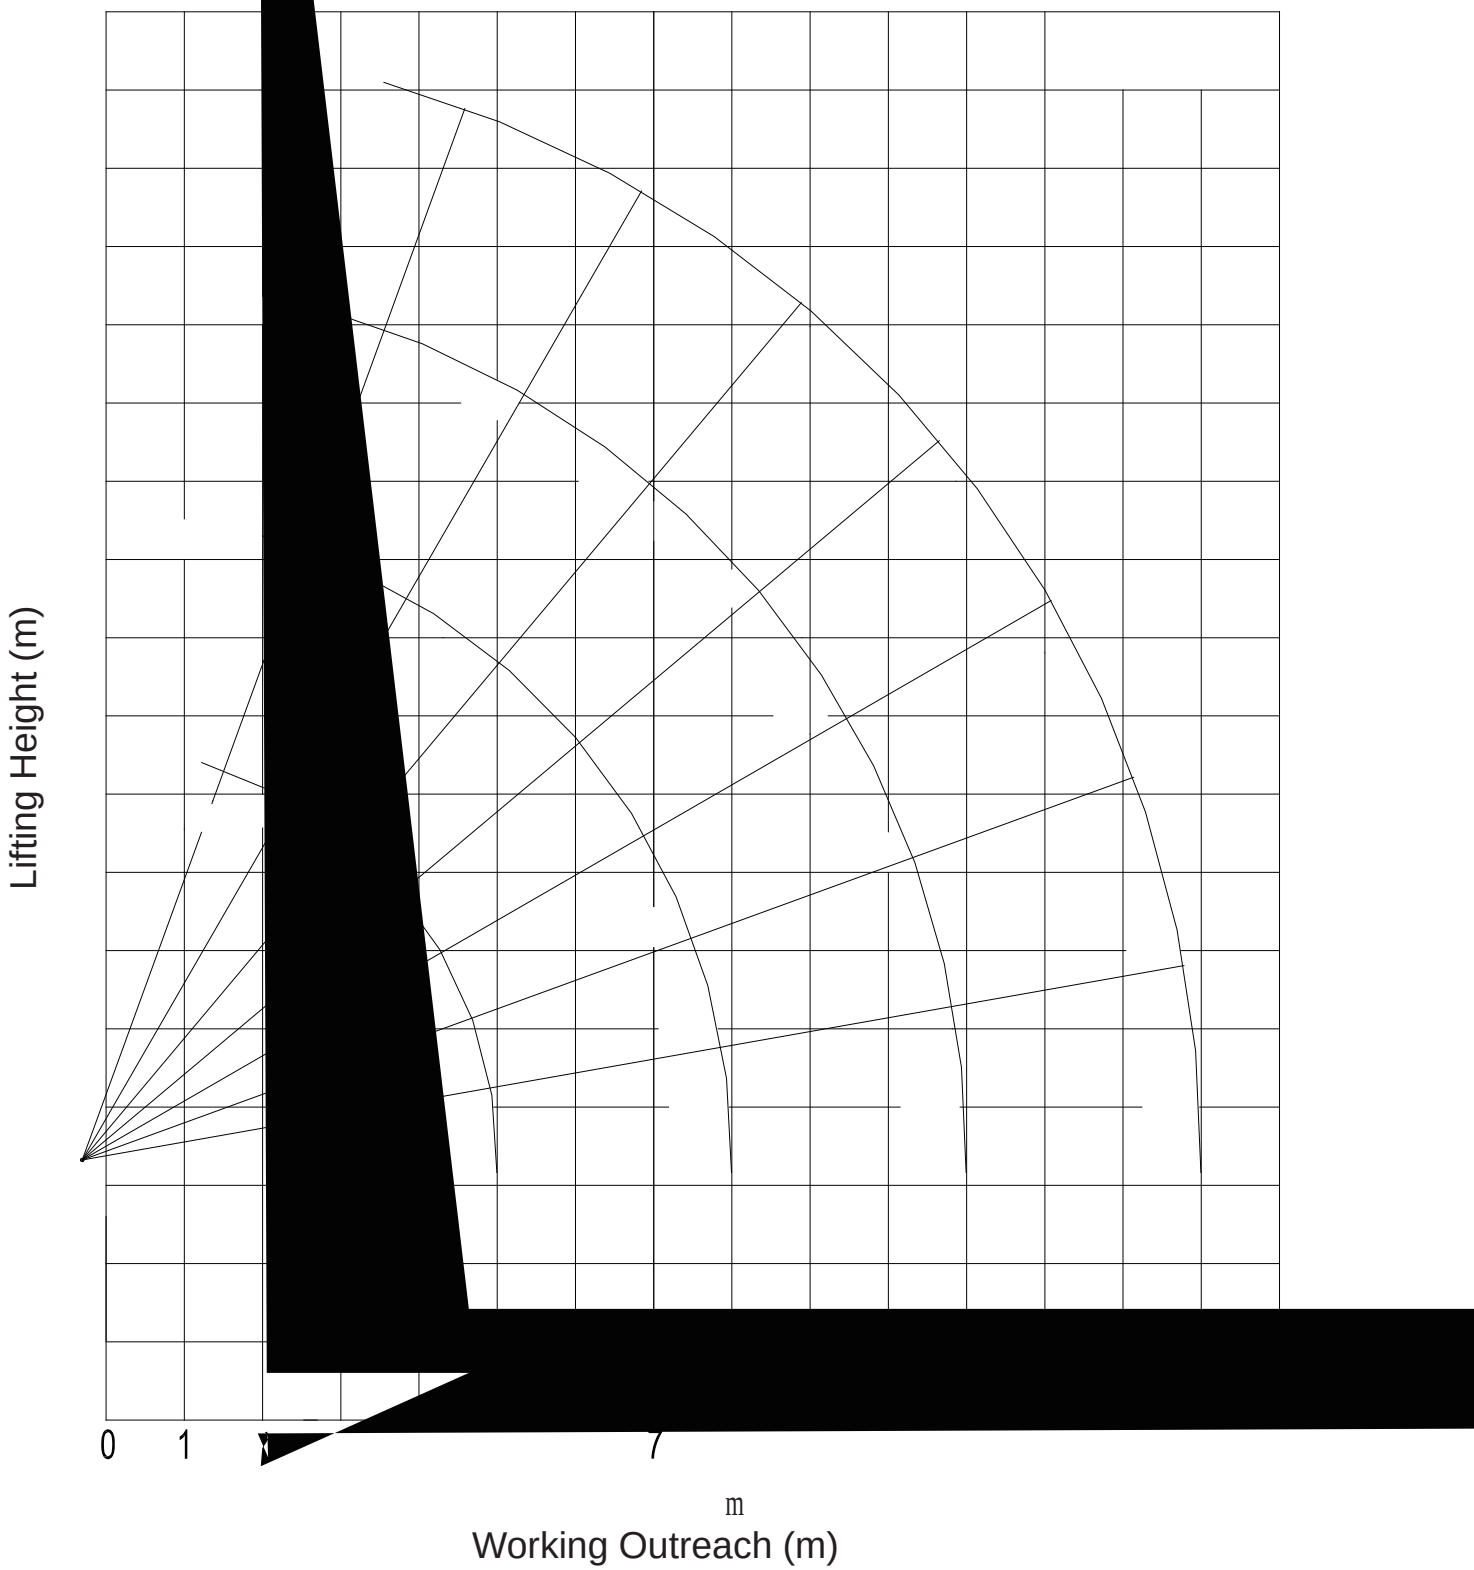

85%

NOTE

The above lifting heights and boom angles are based on a straight (unladen) boom.
Allowance should be made for boom deflection under laden conditions.
Lifting capacities must not exceed 85% of tipping load.

Subject to change,production tolerances have to be taken into account.

SPS20000B/SPS20000C

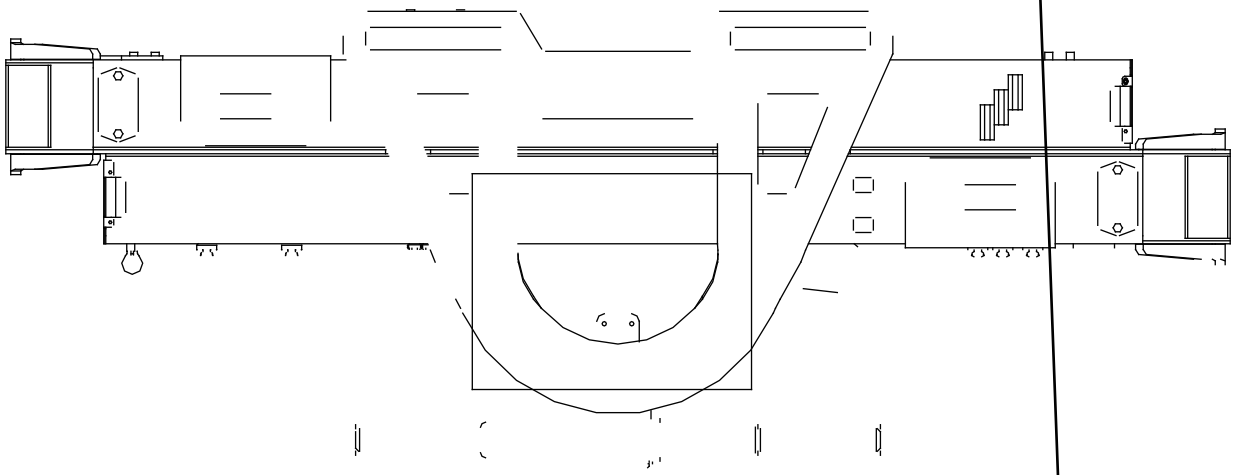

SANY PALFINGER

WWW.SANYPALFINGER.COM